


Bosch 4000S 12L

The Bosch 4000S External is an electronically controlled continuous flow water heater, designed for an easy change-over from the Bosch HydroPower.

The Bosch 4000S 12L External offers:

- ▶ 6 Star efficiency
- ▶ Electronically controlled modulation
- ▶ Designed for easy change-over from the Bosch HydroPower
- ▶ 12L, low gas load model

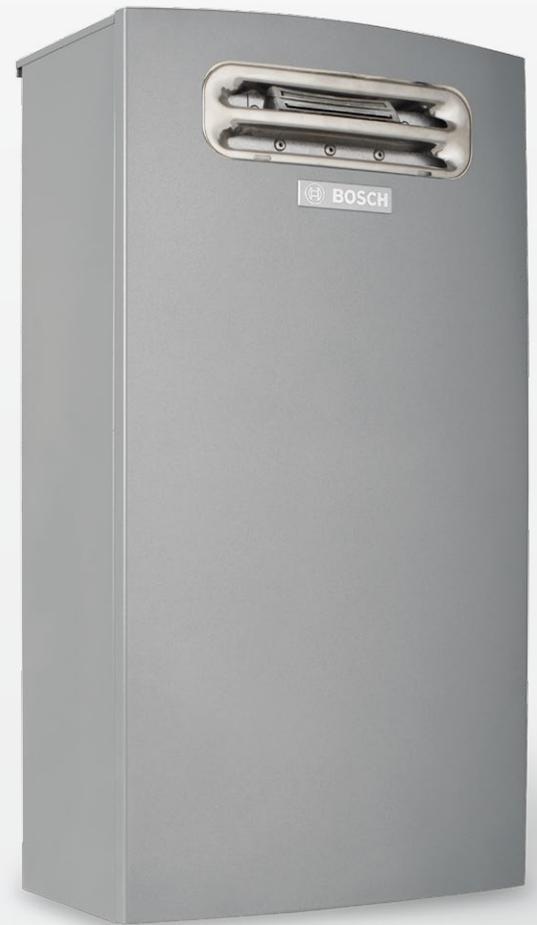

Please contact Bosch on 0800 54 33 52 or visit www.bosch-climate.co.nz for more information.



BOSCH


Hot Water & Heating

Bosch 4000S External



- ▶ 6 Star efficiency
- ▶ Electronically controlled modulation
- ▶ Easy change-over from the Bosch HydroPower

Technical Features	Units	12L model
Performance		
Maximum Gas Consumption	MJ	90
Minimum Gas Consumption	MJ	11.9
Efficiency at 100% of nominal load	%	82.4
Data relating to gas – Permissible gas supply pressure		
Natural gas	kPa	1.13
LP gas	kPa	2.75
Data relating to the water		
Maximum admissible pressure	kPa	1000
Minimum operating pressure	kPa	100
Start up flow @ 15°C inlet water temperature	l/min	2.0
Maximum flow, corresponding to a temperature increase of 25°C	l/min	12.0
Maximum inlet temperature	°C	80
Electrical circuit		
Power supply voltage	V	230
Maximum power consumption	W	100
General data		
Weight (unpacked)	kg	10
Height	mm	570
Width	mm	300
Depth	mm	170
Warranty Details (Domestic)		
Parts and Labour	Years	3
Heat Exchanger only	Years	10

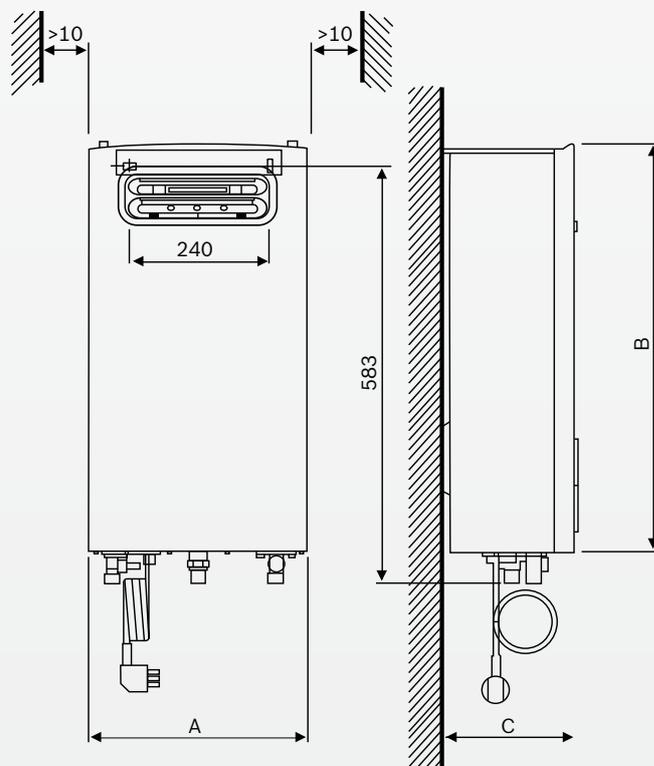

Measurements (mm)

12L model

A	B	C
300	568	170

Description

4000S External 12L NG
4000S External 12L LPG

Bosch Part Number

7736502491
7736502492

Please contact Bosch on 0800 54 33 52 or visit www.bosch-climate.co.nz for more information.



BOSCH
Hot Water & Heating